
Single-Turn Surface-Mount 1/4" Square Cermet Trimmers, Sealed

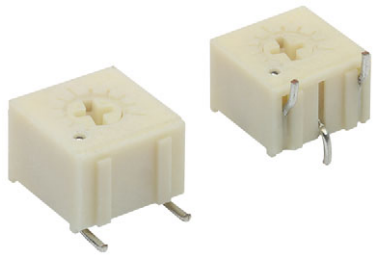

FEATURES

- 0.5 W at 70 °C
- Professional and industrial grade
- Wide ohmic range (10 Ω to 2 MΩ)
- Small size for optimum packaging density
- Top and side adjust styles
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912

RoHS COMPLIANT

LINKS TO ADDITIONAL RESOURCES


3D Models

The TS7 trimming potentiometer has been designed for surface-mount applications and offers volumetric efficiency 6.7 mm x 7 mm x 5 mm with high performance and stability.


The TS7 design is sealed to withstand harsh environments and standard board wash processing, compatible with automated PCB assembly (pick and place), withstands standard reflow soldering processes and designed automatic machine adjust interface.

DIMENSIONS in millimeters (± 0.5 mm)

TS7Y (TOP ADJUST)

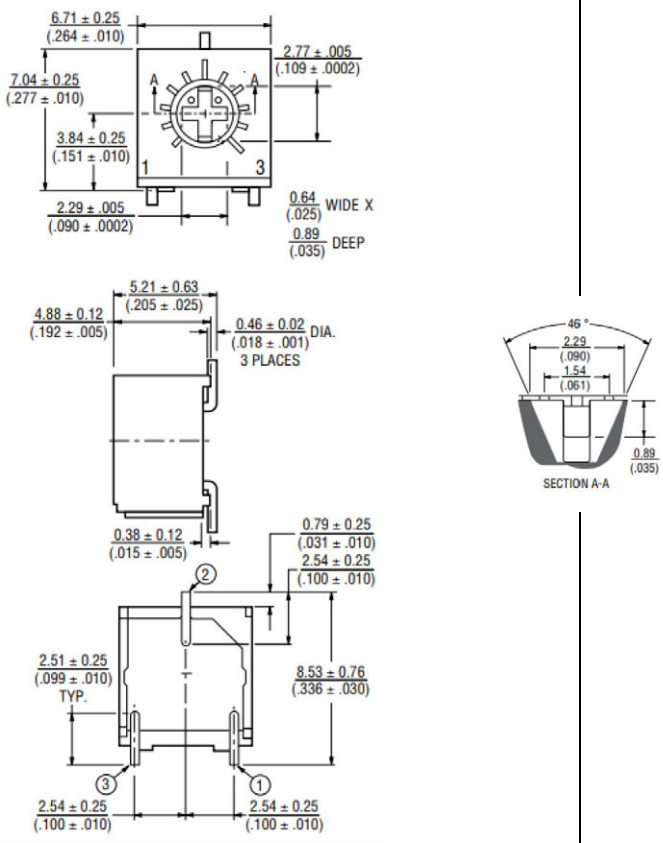

TS7X (SIDE ADJUST)

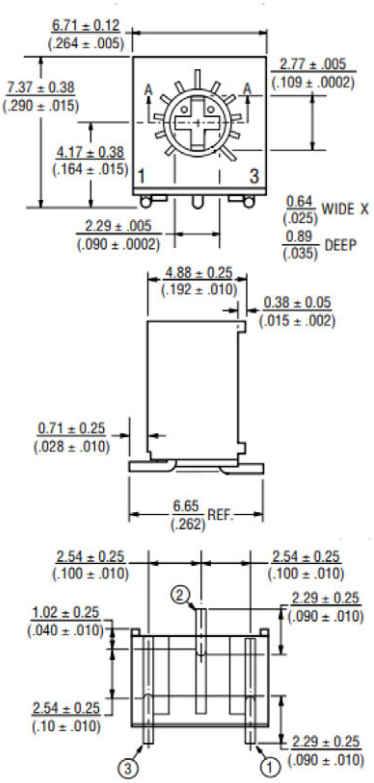



For technical questions, contact: sferpottrimmers@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000



DIMENSIONS in millimeters (± 0.5 mm)

RECOMMENDED SOLDERING AREA

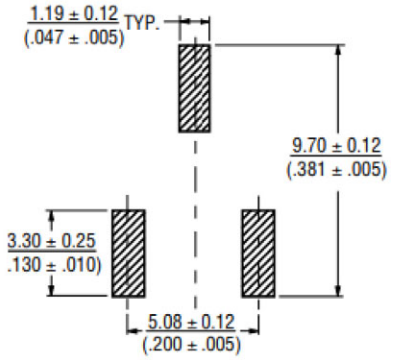

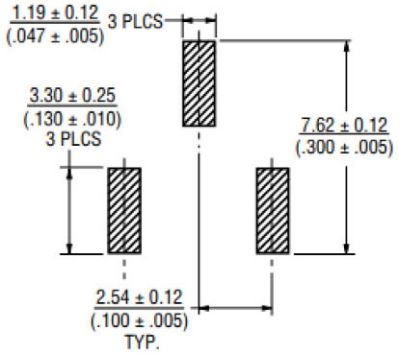

ELECTRICAL SPECIFICATIONS

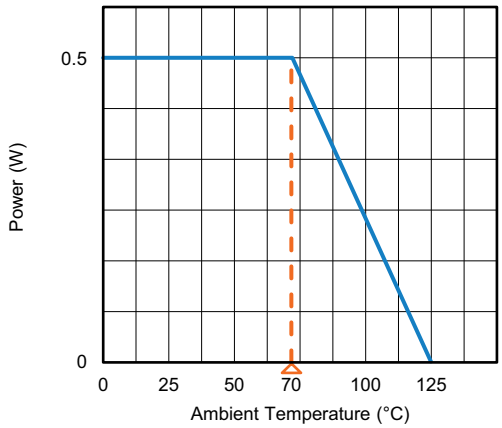Resistive element	Cermet
Electrical travel	240° nom.
Resistance range	10 Ω to 2 MΩ (see “Standard Resistance Element Data” table)
Standard series	1 - 2 - 5
Tolerance standard	± 10 %
Circuit diagram	
Power rating linear	0.5 W at +70 °C 
Temperature coefficient	See “Standard Resistance Element Data” table
Limiting element voltage	300 V
Contact resistance variation (typical)	3 % or 3 Ω max.
End resistance (typical)	1 % or 2 Ω max.
Dielectric strength	900 V_{AC}
Insulation resistance	1000 MΩ min. at 500 V_{DC}

MECHANICAL SPECIFICATIONS

Mechanical travel	270 mon.
Operating torque (max. Ncm)	2.1
End stop torque	4.9
Unit weight (max. g)	0.56
Wiper (actual travel)	Positioned at approximately 50 %

For technical questions, contact: sferpottrimmers@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

ENVIRONMENTAL SPECIFICATIONS	
Temperature range	-55 °C to +125 °C
Sealing	Sealed container. 85 °C Fluorinert / 60 s
MSL level	3

SOLDERING RECOMMENDATIONS

Recommended reflow profile 2, see application note www.vishay.com/doc?52029

PERFORMANCES

TESTS	CONDITIONS	TYPICAL VALUES AND DRIFTS
Load life	1000 h at rated power, ambient temperature +70 °C	Total resistance shift = ± 3 % Contact resistance variation = 3 Ω or ± 3 % whichever is greater
Humidity	MIL-STD-202 method 103 96 hours	Total resistance shift = ± 2 % Insulation resistance = 10 MΩ
Thermal shock	5 cycles	Total resistance shift = ± 2 % Voltage ratio shift = ± 2 %
Rotational cycling	200 cycles	Total resistance shift = ± 4 % Contact resistance variation = 3 Ω or ± 3 % whichever is greater
Shock	100 *g*, 6 shocks in each axis, 3 in each direction	Total resistance shift = ± 1 % Voltage ratio shift = ± 1 %
Vibration	4 sweeps at 30 *g* in each of the three axis, 15 minutes per sweep	Total resistance shift = ± 1 % Voltage ratio shift = ± 1 %

Note

- Nothing stated herein shall be construed as a guarantee of quality or durability

STANDARD RESISTANCE ELEMENT DATA

RESISTANCE CODE	STANDARD RESISTANCE VALUES	LINEAR LAW			TYPICAL TCR -55 °C +125 °C
		MAX. POWER AT 70 °C	MAX. WORKING VOLTAGE	MAX. CURRENT THROUGH WIPER	
	Ω	W	V	mA	ppm/°C
100	10	0.5	2.24	223.6	± 100
200	20	0.5	3.16	158.1	
500	50	0.5	5.00	100.0	
101	100	0.5	7.07	70.7	
201	200	0.5	10.00	50.0	
501	500	0.5	15.81	31.6	
102	1000	0.5	22.36	22.4	
202	2000	0.5	31.62	15.8	
502	5000	0.5	50.00	10.0	
103	10 000	0.5	70.71	7.1	
203	20 000	0.5	100.00	5.0	
253	25 000	0.5	111.80	4.5	
503	50 000	0.5	158.11	3.2	
104	100 000	0.5	223.61	2.2	
204	200 000	0.45	300.00	1.50	
254	250 000	0.36	300.00	1.20	
504	500 000	0.18	300.00	0.6	
105	1 000 000	0.09	300.00	0.3	
205	2 000 000	0.05	300.00	0.2	

MARKING

- Vishay trademark
- Model
- Ohmic value
- Manufacturing date

For technical questions, contact: sferpottrimmers@vishay.com


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

PACKAGING in millimeters (inches)


On tape and reel, by 500 pieces for TS7X and by 750 pieces for TS7Y

TAPE


TS7X

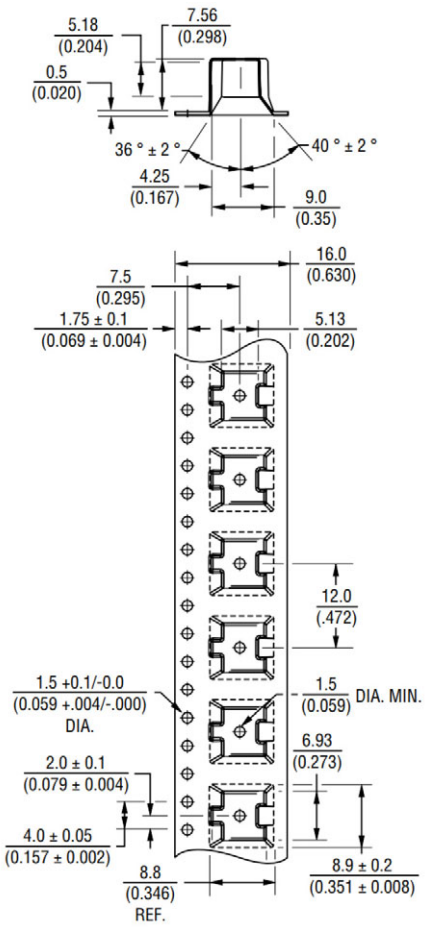

TS7Y

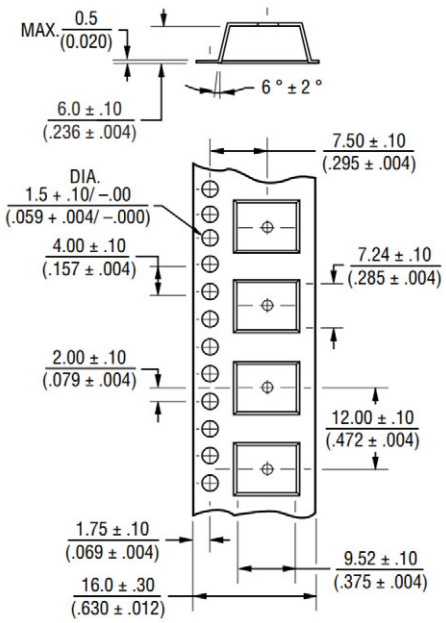

REEL

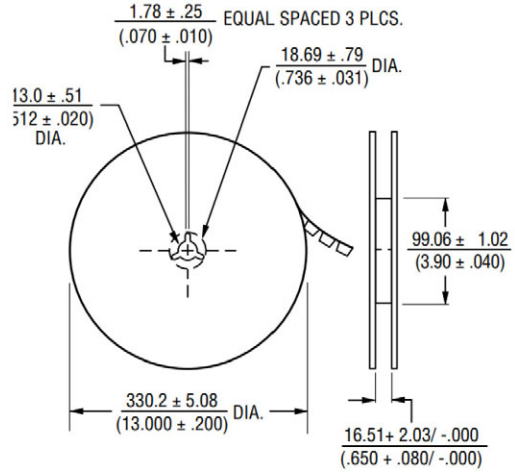

For technical questions, contact: sferpottrimmers@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

ORDERING INFORMATION (part number)

T	S	7	Y	1	0	3	K	R	3	2				

MODEL	STYLE	OHMIC VALUE	TOLERANCE	PACKAGING	SPECIAL NUMBER
TS7	**Y** (top adjust) **X** (side adjust)	From 10 Ω to 2 MΩ **103** = 10 kΩ	**K** = ± 10 %	**R10** = tape and reel 500 pieces **R32** = tape and reel 750 pieces	(If applicable) Given by Vishay for custom design

DESCRIPTION (for information only)

TS7	Y	10K	10 %		TR	e3
MODEL	STYLE	VALUE	TOLERANCE	SPECIAL	PACKAGING	LEAD (Pb)-FREE

RELATED DOCUMENTS

APPLICATION NOTES	
Potentiometers and Trimmers	www.vishay.com/doc?51001
Guidelines for Vishay Sfernice Resistive and Inductive Components	www.vishay.com/doc?52029

For technical questions, contact: sferpottrimmers@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Vishay”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

© 2025 VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000