
INTRODUCING

Direct-To-Device (D2D) Ready Antennas

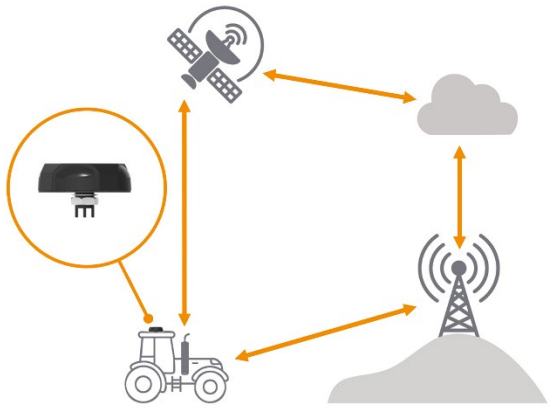

- **Direct-to-Device (D2D)/Direct-to-Cell (D2C) ready**
- **Single band and MIMO static or mobile options**
- **Reference Signal Received Power (RSRP) performance exceeds required levels**

The Direct-to-Device (D2D), or Direct-to-Cell (D2C), family offers a wide range of ground-based IoT antennas for Terrestrial Network (TN) and Non-Terrestrial Network (NTN), dual-mode communications.
With proven performance in LTE bands for Low Earth Orbit (LEO) Satellite Direct to Device IoT plus traditional cellular applications.

APPLICATIONS

- Agriculture monitoring and control
- Fleet tracking & management
- Supply chain container monitoring
- Maritime
- Energy
  - Oil & Gas – Offshore platform monitoring
  - Pipeline, Transmission line monitoring and control
- Lone worker safety
- Drone surveillance
- Wildlife tracking
- Other IoT devices

ELECTRICAL

- Varies by model. See individual datasheets linked in the customer presentation

MECHANICAL

- Varies by model. See individual datasheets linked in the customer presentation

KEY BENEFITS

- Validated for use on satcom D2D networks
- Dual-mode terrestrial (TN) and non-terrestrial (NTN) network capable
- Antenna family provides wide range of options for variety of use cases and applications
- Single band and MIMO options
- Static or mobile options
- Proven Reference Signal Received Power (RSRP) performance

STANDARDS AND SPECIFICATIONS

- Varies by model. See individual datasheets linked in the customer presentation

LEARN MORE

- Product Page
- Customer Presentation

TE Connectivity, TE and TE connectivity (logo) are trademarks.