Designing the VCNL36821S Into an Application

By Reinhard Schaar

INTRODUCTION AND BASIC OPERATION

The VCNL36821S is a fully integrated proximity sensor. It combines an infrared emitter and photodiode for proximity measurement and signal processing IC in a single package with a 12-bit ADC.

With a range of up to 30 cm (12"), this stand-alone component greatly simplifies the use and design-in of a proximity sensor in consumer and industrial applications, because no mechanical barriers are required to optically isolate the emitter from the detector. The VCNL36821S features a miniature, surface-mount 2.55 mm by 2.05 mm leadless package (LLP) with a low profile of 1 mm. The device is designed specifically to meet the low height requirements of smartphone, mobile phone, digital camera, and tablet PC applications.

Through its standard I^2C bus serial digital interface, it allows easy access to a “proximity signal”. The programmable interrupt function offers wake-up functionality for the microcontroller when a proximity change occurs, which reduces processing overhead by eliminating the need for continuous polling.



Fig. 1 - VCNL36821S Top View

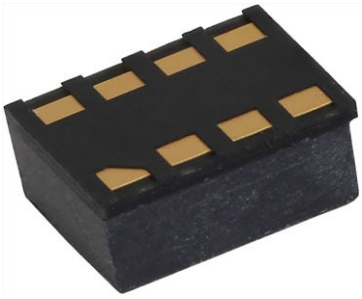


Fig. 2 - VCNL36821S Bottom View

COMPONENTS (BLOCK DIAGRAM)

The major components of the VCNL36821S are shown in the block diagram.

In addition to the ASIC with the proximity photodiode, the infrared emitter is also implemented. Its cathode is connected to the driver internally and need not be connected externally.

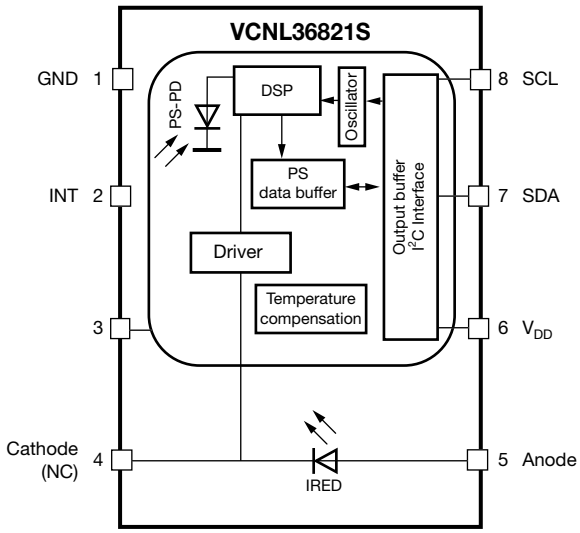


Fig. 3 - VCNL36821S Detailed Block Diagram

The integrated infrared emitter has a peak wavelength of 940 nm. It emits light that reflects off an object to allow for detection within 30 cm of the sensor.

APPLICATION NOTE

For technical questions, contact: sensorstechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Designing the VCNL36821S Into an Application

The infrared emitter has a programmable drive current from 50 mA to 156 mA in eight steps. The infrared light is emitted in short pulses with a programmable period time from 10 ms to 80 ms. The proximity photodiode receives the light that is reflected off the object and converts it to a current. The sensitivity of the proximity stage is also programmable by choosing from four different integration times. It is insensitive to ambient light. It ignores the DC component of light and “looks for” the pulsed light at the proximity frequency used by the emitter.

The application-specific integrated circuit, or ASIC, includes an LED driver, I^2C bus interface, amplifier, integrated analog-to-digital converter, oscillator, and Vishay’s “secret sauce” signal processor. For proximity, it converts the current from the photodiode to a 12-bit digital data output value.

PIN CONNECTIONS

Fig. 3 shows the pin assignments of the VCNL36821S.

The connections include:

- Pin 1 - connect to ground
- Pin 2 - INT to microcontroller
- Pin 3 - NC or connect to ground
- Pin 4 - IRED cathode (NC)
- Pin 5 - IRED anode to the power supply
- Pin 6 - V_{DD} to the power supply
- Pin 7 - SDA to microcontroller
- Pin 8 - SCL to microcontroller

The power supplies for the ASIC (V_{DD}) has a defined range from 1.7 V to 3.6 V. The IRED should be connected to a power supply between 2.5 V and 3.6 V depending on the required current, see detailed description with the datasheet.

On both power supply, a ceramic 1 µF should be placed close to the pin 5 and pin 6. The SCL and SDA, as well as the interrupt lines, need pull-up resistors. The resistor values depend on the application and on the I^2C bus speed. Common values are about 2.2 kΩ to 4.7 kΩ for the SDA and SCL, and about 8.2 kΩ to 22 kΩ for the interrupt lines.

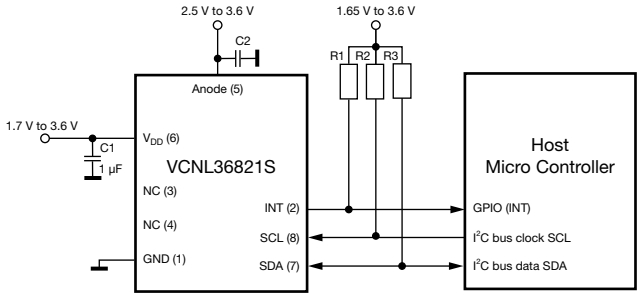


Fig. 4 - VCNL36821S Application Circuit

MECHANICAL DESIGN CONSIDERATIONS

The VCNL36821S does not require a mechanical barrier. The signal processor continuously compensates for the light reflected from windows, thus ensuring a proper proximity reading. As a fully integrated sensor, the design process is greatly simplified.

The only dimensions that the design engineer needs to consider are the distance from the top surface of the sensor to the outside surface of the window, and the size of the window. These dimensions will determine the size of the detection zone.

The angle of half sensitivity of the photodiode is about ± 55°, as shown in Fig. 5.

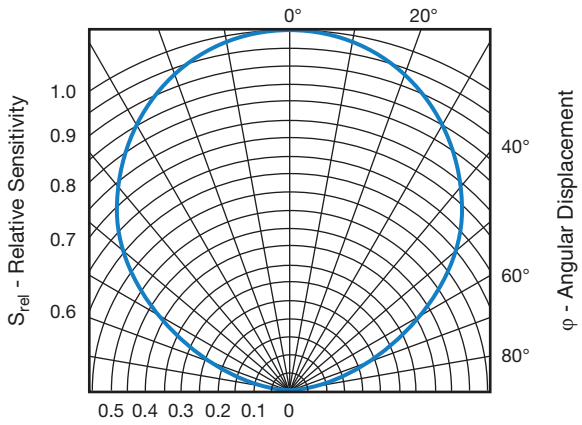


Fig. 5 - Angle of the Half Sensitivity of the Photodiode

APPLICATION NOTE

For technical questions, contact: sensorstechsupport@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Designing the VCNL36821S Into an Application

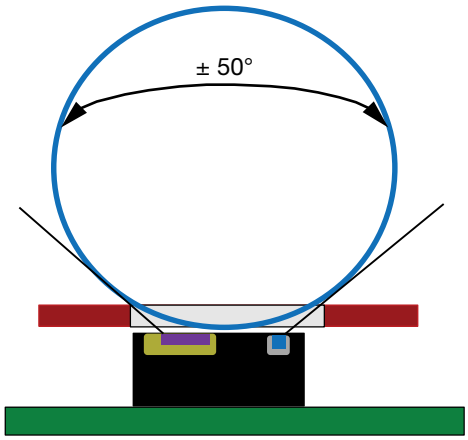


Fig. 6 - Emitter and Detector Angle

To achieve good performance, the diameter of the hole within the cover glass should not be too small. An angle of ± 50° will be sufficient in most applications. The package drawing shows the position of the IRED and photosensitive area. The ± 50° lines are set to outer edges of the photodiode and IRED. The following are dimensions for the distance from the top surface of the sensor to the outside surface of the glass, a, and the width of the window, d.

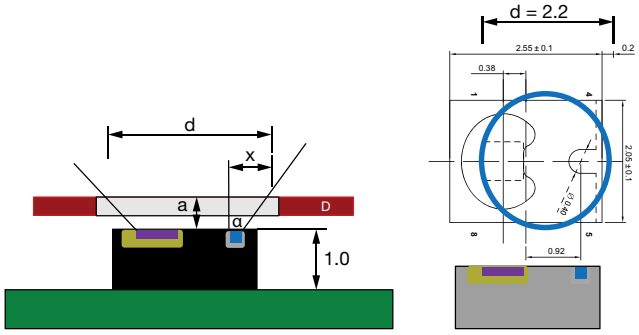


Fig. 7 - Window Dimensions for One Hole

For a single round hole, the diameter should be at least wide enough that the openings can freely look through; so, about 2.2 mm.

The diameter needs to be increased with distances between the sensor and cover glass according to the following calculation.

The width calculation for distances from 0 mm to 1.5 mm results in:

a = 0.0 mm→ x = 0.0 → d = 2.2 mm + 0.0 = 2.2 mm
a = 0.5 mm→ x = 0.6 → d = 2.2 mm + 1.2 = 3.2 mm
a = 1.0 mm→ x = 1.2 → d = 2.2 mm + 2.4 = 4.6 mm
a = 1.5 mm→ x = 1.8 → d = 2.2 mm + 3.6 = 5.8 mm

Calculation is: tan α = x/a → with α = 50° and tan 50° = 1.2 = x/a → x = 1.2 × a. Then total width / diameter for the opening is d = 2.2 mm + 2 × x.

The results above represent the ideal diameters of the window. The mechanical design of the device may not allow for these diameters. Fig. 9 shows that also a smaller opening could be used. To allow for this, the gap between sensor and cover should be as small as possible (≤ 0.2 mm) and the cover also quite thin (≤ 0.6 mm).

PROXIMITY SENSOR

The main DC light sources found in the environment are sunlight and tungsten (incandescent) bulbs. These kinds of disturbance sources will cause a DC current in the detector inside the sensor, which in turn will produce noise in the receiver circuit. The negative influence of this DC light can be reduced by optical filtering, but is reduced much more efficiently by a so-called DC kill function. The proximity photodiode shows a sensitivity only for wavelength ≥ 800 nm, so, surpresses all visible illuminances, as shown in Fig. 10.

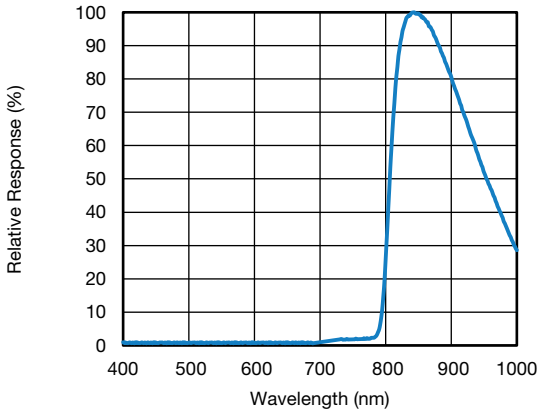


Fig. 8 - Spectral Sensitivity of the Proximity Photodiode

The proximity sensor uses a short pulse signal of about 50 µs (PS_IT = 1T) up to 400 µs (PS_IT = 8T). The period time for this single pulse can be programmed between 10 ms and 80 ms.

APPLICATION NOTE

For technical questions, contact: sensorstechsupport@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Designing the VCNL36821S Into an Application

In addition to DC light source noise, there is some reflection of the infrared emitted light off the surfaces of the components surrounding the VCNL36821S. The distance to the cover, proximity of surrounding components, tolerances of the sensor, defined infrared emitter current, ambient temperature, and type of window material used all contribute to this reflection. The result of the reflection and DC noise is the production of an output current on the proximity and light sensing photodiode. This current is converted into a count called the offset count.

In addition to the offset count, there could also be a small noise floor during the proximity measurement, which comes from the DC light suppression circuitry. This noise is typically just one or two counts. Only with light sources with strong infrared content could it be in the range from ± 5 counts to ± 10 counts.

The application should “ignore” this offset and small noise floor by subtracting them from the total proximity readings. The VCNL36821S offers a subtraction feature that automatically does this: PS_CANC. During the development of the end product, this offset count is evaluated and may now be written into register 7: PS_CANC_L/M. Now the proximity output data will just show the subtraction result of proximity counts - offset counts.

Results most often do not need to be averaged. If an object with very low reflectivity or at longer range needs to be detected, the sensor provides a register where the customer can define the number of consecutive measurements that the signal must exceed before producing an interrupt. This provides stable results without requiring averaging.

PROXIMITY CURRENT CONSUMPTION

The VCNL36821S offers a shutdown mode. Default values after start-up have this enabled. The application needs to activate the sensor with standby = 1.

The VCNL36821S’s embedded LED driver drives the internal IRED with a pulsed duty cycle. The IRED on / off duty ratio is programmable by an I^2C command at register PS_Period. Depending on this pulse / pause ratio, the overall proximity current consumption can be calculated. When higher measurement speeds or faster response times are needed, PS_Period may be set to a short time of 10 ms, but this will then also lead to the highest current consumption:

PS_Period = 10 ms: peak IRED current = 156 mA, PS_IT = 1T = 50 µs, averaged current consumption is 156 mA x 50 µs/10 000 µs = 0.78 mA.

For proximity measurements executed just every 80 ms: PS_Period = 80 ms, peak IRED current = 20 mA, averaged current consumption is 156 mA x 50 µs/80 000 µs = 0.0975 mA.

An extremely power-efficient way to execute proximity measurements is to apply a PS active force mode (register: PS_CONF3, command: PS_AF = 1).

If only a single proximity measurement needs to be done, PS_AF is set to “1” and then PS_SD = 0 = active. Setting PS_Trig = 1 will then execute just one single measurement.

In this mode, only the I^2C interface is active. In most consumer electronic applications the sensor will spend the majority of time in sleep mode; it only needs to be woken up for a proximity measurement. In standby mode the power consumption is about 0.5 µA.

For technical questions, contact: sensorstechsupport@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Designing the VCNL36821S Into an Application

"LOW POWER CONSUMPTION" MODE

With register PS_LPEN set to 1, the proximity sensor operates in a special low power consumption mode offering significant lower power consumption.

This is a remarkable feature for any application requiring lower power consumption and did not want to always request one proximity measurement with proximity force mode: PS_AF and PS_TRIG.

The proximity period within this mode is possible to set between 40 ms and 320 ms, means, 25 measurements down to just 3 measurements per second can be programmed where the "nomal mode" with PS_Period allows only for settings between 10 ms and 80 ms.

PS period (ms)	10	20	40	80	160	320
Normal mode (μA)	2794	1492	841	515	n/a	n/a
Low power mode (μA)	n/a	n/a	106	56	30	17.6

Notes

- IR LED = 130 mA, PS_IT = x 4, PS_ITB = 50 μs
- While register PS_LPEN = 1, proximity sensor

With PS_LPEN = 1 = enabled, proximity low power measurements will start. In this case values programmed to PS_LPPER will be used as period. VCSEL_I, PS_IT, PS_ITB and PS_MPS will be used as defined within register 3 and register 4.

TABLE 12 - REGISTER: PS_LP DESCRIPTION

		COMMAND CODE: 0x08_H (0x08 DATA BYTE HIGH)
Register	Bit	Description
Reserved	7 : 3	Default = (0 : 0 : 0 : 0 : 0)
PS_LPPER	2 : 1	(0 : 0) = 40 ms, (0 : 1) = 80 ms, (1 : 0) = 160 ms, (1 : 1) = 320 ms; PS detection period setting at low power mode (PS_LPEN = 1)
PS_LPEN	0	0 = disable, 1 = enable = starts proximity low power measurements; now PS_LPPER used as period, but VCSEL_I, PS_IT, PS_ITB, PS_MPS as defined within register 3 and register 4

	PS_IT = 50 μs; PS_LPPER period (ms)					PS_IT = 200 μs; PS_LPPER period (ms)			
ILED (mA)	40	80	160	320	ILED (mA)	40	80	160	320
50	67.75	36.38	20.69	12.84	50	256	130.5	67.75	36.38
66	87.75	46.38	25.69	15.34	66	336	170.5	87.75	46.38
82	107.75	56.38	30.69	17.84	82	416	210.5	107.75	56.38
98	127.75	66.38	35.69	20.34	98	496	250.5	127.75	66.38
114	147.75	76.38	40.69	22.84	114	576	290.5	147.75	76.38
130	167.75	86.38	45.69	25.34	130	656	330.5	167.75	86.38
144	185.25	95.13	50.06	27.53	144	726	365.5	185.25	95.13
156	200.25	102.63	53.81	29.41	156	786	395.5	200.25	102.63

With low power mode applied, VCNL36821S current consumption reach to minimum of 13 μA with longest response time of 320 ms, lowest LED current of 50 mA and shortest integration time of PS_IT = 50 μs.

A maximum of 786 μA is seen when using with the fast response time of 40 ms, highest LED current of 156 mA and longest integration time of PS_IT = 200 μs.

For technical questions, contact: sensorstechsupport@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Designing the VCNL36821S Into an Application

The pulse length of PS_IT = 1T is typ. 50 µs, ± 20 % tolerances are possible. Amplitude of that 50 µs pulse is dependent on the IRED current. The higher this current is programmed, the higher that pulse amplitude will be. Taking a scope picture with added series resistor within power supply line will look like this:

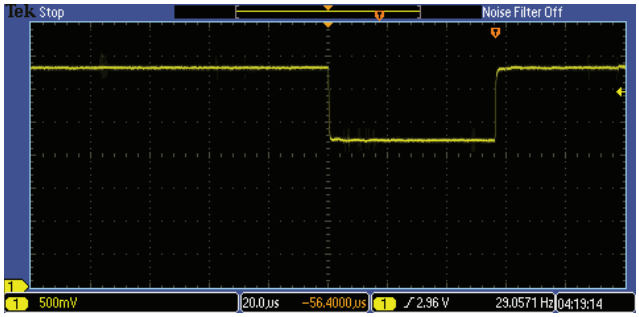


Fig. 9 - Proximity IRED Pulse for 1T

INITIALIZATION AND I²C TIMINGS

The VCNL36821S contains eleven 16-bit command codes for operation control, parameter setup, and result buffering. All registers are accessible via I²C communication. The built-in I²C interface is compatible with the standard and high-speed I²C modes. The I²C H-level voltage range is from 1.65 V to 3.6 V.

There are only four registers out of the eleven that typically need to be defined:

1. LED_I = 50 mA to 156 mA (IRED current)
   REGISTER CONF4 #04 [0x04h]
2. PS_Period = 10 ms to 80 ms (proximity duty ratio), PS_IT (proximity integration time = pulse length), PS_PERS (number of consecutive measurements above / below threshold), and PS_SD (PS power_on)
   REGISTER PS_CONF1 and PS_CONF2 #03 [0x03h]
3. and 4. Definition of the threshold value from the number of counts the detection of an object should be signaled. Proximity TOP Threshold REGISTER
   PS_THDL_L #05 [0x05h] for the low byte and
   PS_THDL_H #06 [0x06h] for the high byte.

To define the IRED current, as well as the integration time (length of the proximity pulsing), evaluation tests should be performed using the least reflective material at the maximum distance specified.

Fig. 12 shows the typical digital counts output versus distance for three different emitter currents for integration time 1T. The reflective reference medium is the Kodak Gray card. This card shows approximately 18 % reflectivity.

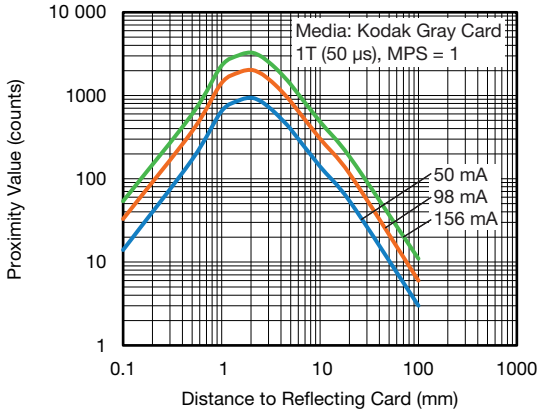


Fig. 10 - Proximity Value vs. Distance for 1T

This first diagram shows the possible detection counts with a short pulse of just 50 µs.

If higher detection distances and / or objects with very low reflectivity need to be detected, there is the option to extend these proximity pulses up to about 400 µs for 8T. This results in higher counts but may also lead to saturation effects for very close and very bright objects. This leads then to the diagram in Fig. 13 below.

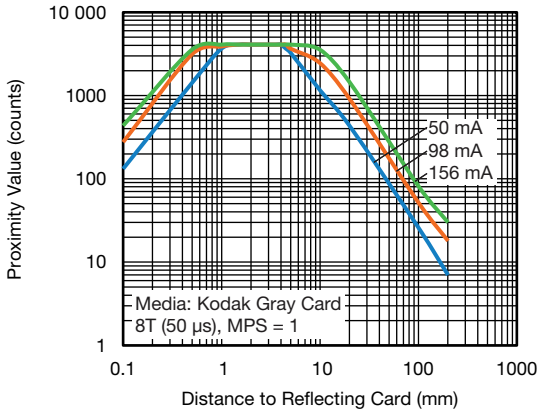


Fig. 11 - Proximity Value vs. Distance; PS_IT = 8T

With defining the period time (PS_Period), the repetition rate = the number of proximity measurements per second (speed of proximity measurements) is defined. This is possible between 10 ms (about 90 measurements/s) and 80 ms (about 12 measurements/s).

For technical questions, contact: sensorstechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Designing the VCNL36821S Into an Application

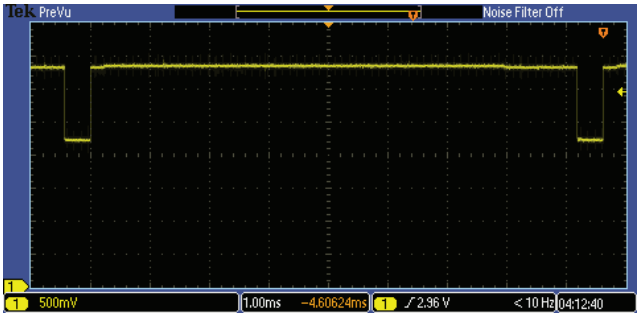


Fig. 12 - Proximity Measurements with PS_Period = 10 ms

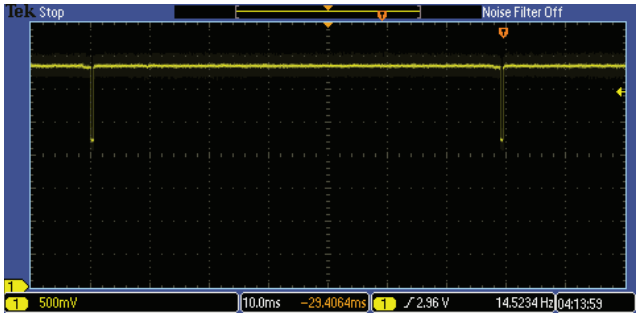


Fig. 13 - Proximity Measurements with PS_Period = 80 ms

This duty cycle also determines how fast the application reacts when an object appears in, or is removed from, the proximity zone.

Reaction time is also determined by the number of counts that must be exceeded before an interrupt is set. This is possible to define with proximity persist: PS_PERS. Possible values are from 1 to 4.

To eliminate disturbance by direct sunlight this “sunlight cancellation” bit PS_SC_EN has to be set. In addition, the compensation current can be modified with PS_SC-CUR in four possible steps from “typical” up to eight times this typical current.

To define all these register values, an evaluation test should be performed. These tests can be made just using the VCNL36821S sensor board together with the SensorXplorer™. Both boards are available from any of Vishay’s distributors. Please see:
www.vishay.com/optoelectronics/SensorXplorer.

Timing

For an I²C bus operating at 100 kHz, to write or read an 8-bit byte, plus start (or stop) and bit acknowledgement, takes 100 µs. Together with the slave address byte and the 8-bit command code byte, plus the 16-bit data, this results in a total of 400 µs. When the device is powered on, the initialization with just these five registers needs 5 x 4 bytes (slave address, command register, and 16-bit data) for a total of 20 bytes. So, 20 x 100 µs = 2000 µs = 2 ms.



The read-out of 16-bit data would take a total of five bytes (slave address, command code, slave address with read bit set) and 16-bit data sent from the VCNL36821S. So, 500 µs:



Power Up

The release of the internal reset, the start of the oscillator, and the signal processor need **2.5 ms**

Initialize Registers

Write to four registers**1600 µs**

- IRED current
- Proximity duty ratio
- Proximity interrupt TOP threshold

Once the device is powered on and the VCNL36821S is initialized, a proximity measurement can be taken.

Asking for one forced proximity measurement	**400 µs**
For (active forced, PS_IT = 8)	
Time to trigger [0.5 x PS_IT]	**200 µs**
DC-kill ambient light [3 x PS_IT]	**1200 µs**
Proximity measurement [1 x PS_IT]	**400 µs**
IRED shutdown [1 x PS_IT]	**400 µs**
Read out of the proximity data	**500 µs**
total:	**3100 µs**

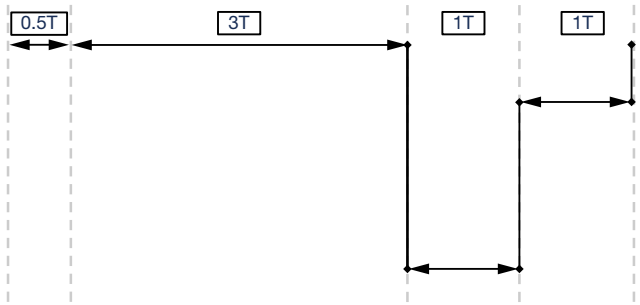


Fig. 14 - Timing Specification for Active Forced Mode

For technical questions, contact: sensorstechsupport@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Designing the VCNL36821S Into an Application

INTERRUPT

The VCNL36821S features a very intelligent interrupt function. The interrupt function enables the sensor to work independently until a predefined proximity event or threshold occurs. It then sets an interrupt which requires the microcontroller to awaken. This helps customers reduce their software effort, and reduces power consumption by eliminating polling communication traffic between the sensor and microcontroller.

The interrupt pin, pin 2, of the VCNL36821S should be connected to a dedicated GPIO of the controller. A pull-up resistor is added to the same power supply that the controller is connected to. This INT pull-up resistor may be in the range of 8.2 kΩ to 100 kΩ.

The events that can generate an interrupt include:

1. A lower and an upper threshold for the proximity value can be defined. If the proximity value falls below the lower limit or exceeds the upper limit, an interrupt event will be generated. In this case, an interrupt flag bit in the read-out register 0xF9 will be set and the interrupt pad of the VCNL will be pulled to low by an open drain pull-down circuit. In order to eliminate false triggering of the interrupt by noise or disturbances, it is possible to define the number of consecutive measurements that have to occur before the interrupt is triggered
2. A too high infrared level as it could be with strong direct sunlight or also close halogen / incandescent lamp can be observed with checking the bit: PS_SPFLAG

Application Example

The following example will demonstrate the ease of using the VCNL36821S sensor.

Offset

During development, the application-specific offset counts for the sensor were determined. As previously mentioned, the offset count is affected by the components surrounding the VCNL36821S, the window or cover being used, the distance from the sensor to the cover, and emitter intensity, which is controlled by the forward current.

In the following example, with a cover over the sensor and setting the emitter current to 156 mA and with PS_MPS = 1 pulse, the offset counts are 300 counts (Fig. 17). Offset counts vary by application and can be anywhere from 0 counts to several hundred counts. It is important to note that the offset count may change slightly over time due to, for example, the window becoming scratched or dirty, or being exposed to high-temperature changes. If possible, the offset value should occasionally be checked and, if necessary, modified.

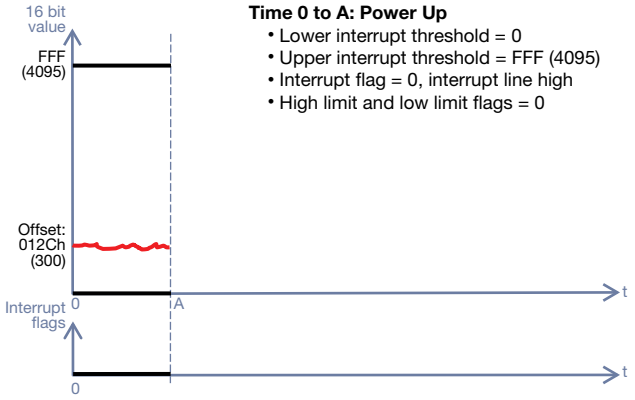


Fig. 15

Power Up

As mentioned, there are four variables for proximity measurement that need to be set in the register when the sensor is powered up: the emitter current, the number of occurrences that must exceed a threshold to generate an interrupt, the threshold values, and the number of proximity measurements per second.

The sensor should detect skin at a distance of 5 cm. Development testing determined that a current of 156 mA (together with PS_IT = 8T and PS_MPS = 1) produces adequate counts for detection. The proximity measurement rate is set so that about 14 measurements are done within a second and the number of occurrences to trigger an interrupt is set to four. Based on development testing, with a hand or skin approximately 5 cm above the window cover, the resulting total count is > 500. This will be used as the upper threshold (high threshold).

For smartphone applications it would be typical to initially set this top threshold and a lower threshold (bottom threshold). This is needed to indicate the removal of the phone from the user's ear. The measured counts without any additional object close by will be around this offset count value, always below the lower threshold value, as shown in Fig. 18.

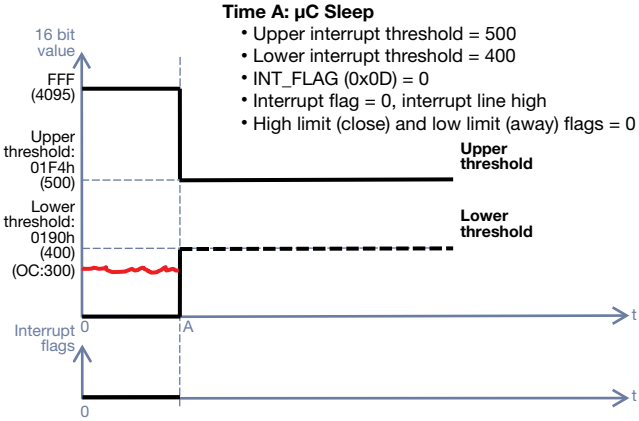


Fig. 16

APPLICATION NOTE

For technical questions, contact: sensorstechsupport@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Designing the VCNL36821S Into an Application

By setting the number of occurences before generating an interrupt to 4, a single proximity value above or below the thresholds will have no effect, as shown in Fig. 19.

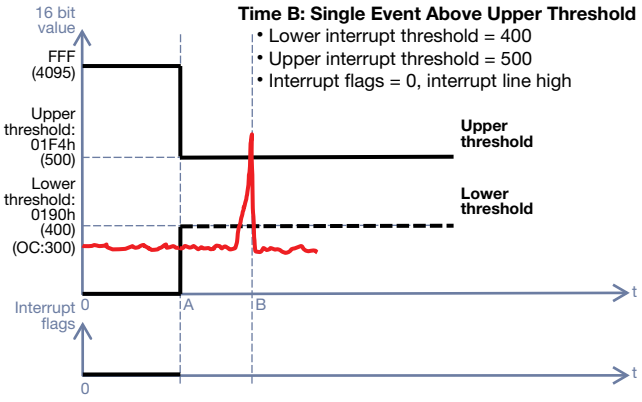


Fig. 17

A smartphone application will use a proximity sensor to detect when the phone is brought to the user's ear and disable the touchscreen and turn off the backlight. For other applications, such as automatic dispensing, the soap or towel will be dispensed.

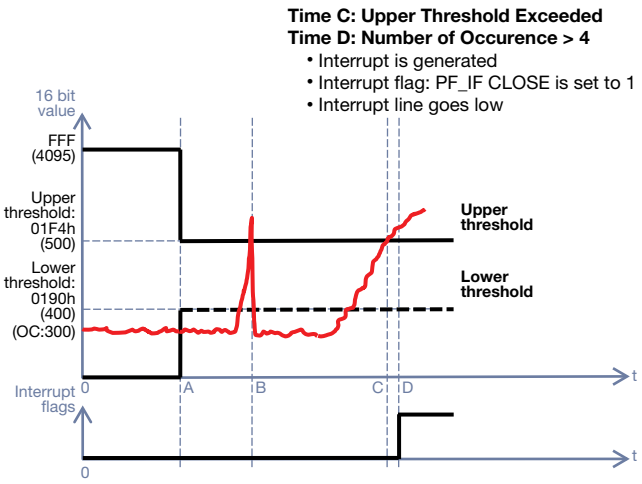


Fig. 18

In smartphone applications, the bottom threshold will also be programmed and wait for an interrupt signal. The prox_threshold_bottom should be set to "1" now and the prox_threshold_top cleared by entering a "1" again, since the phone is already next to the user's ear. A lower threshold will occur when the phone call is complete and the phone is brought away from the user's ear, and the backlight and touchscreen will be turned back on.

For this example, the upper threshold will be set to 500 counts. The lower threshold is set to 400 counts; a value that is higher than the offset but low enough to indicate the removal of the phone from the user's ear.

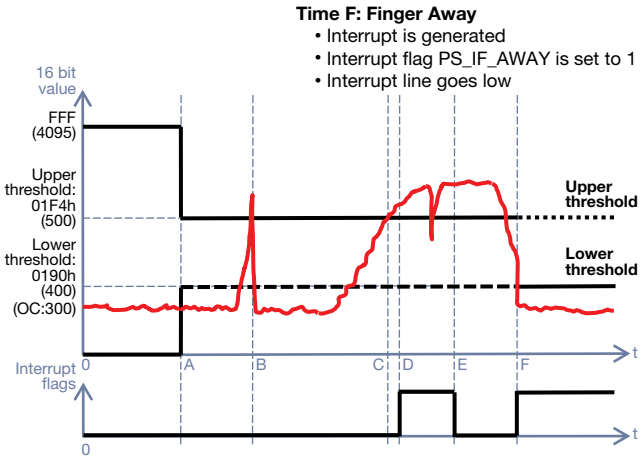


Fig. 19

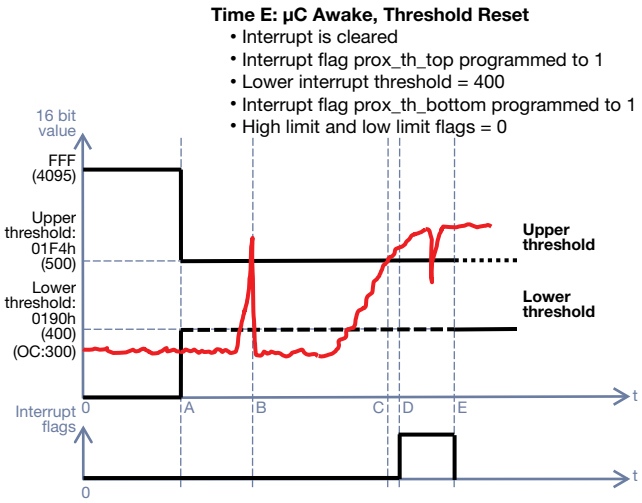


Fig. 20

APPLICATION NOTE

For technical questions, contact: sensorstechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Designing the VCNL36821S Into an Application

Some measurements and features are shown with the demo tool and demo software with a cover glass at about a 1 mm distance.

1. Proximity set-up with 8T wide pulses, 156 mA IRED current, PS_MPS = 1, and a period of 80 ms, which results in about 15 measurements per second

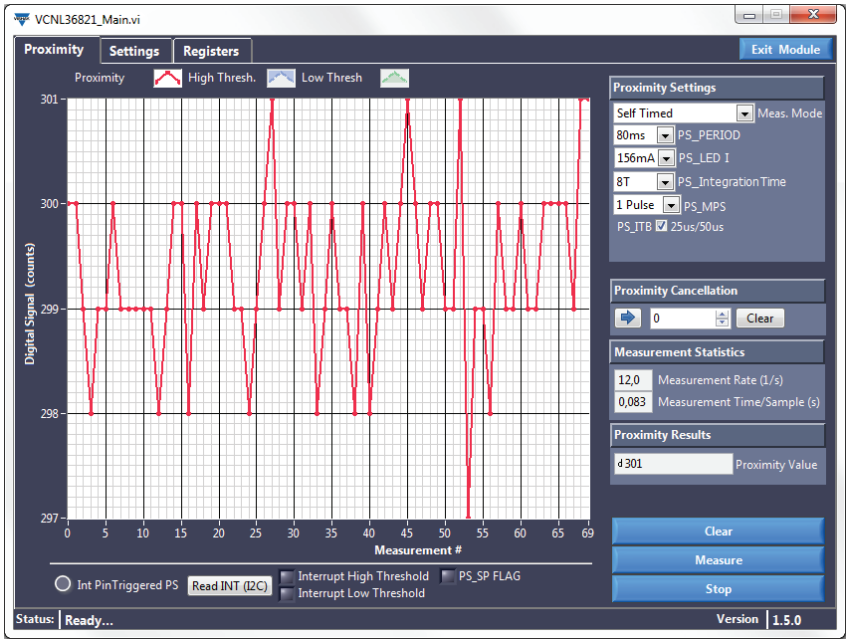


Fig. 21 - Screenshot of VCNL36687 Demo Software

2. If a hand or skin now comes as close as 5 cm, these 300 counts rise up to more than 500 counts.

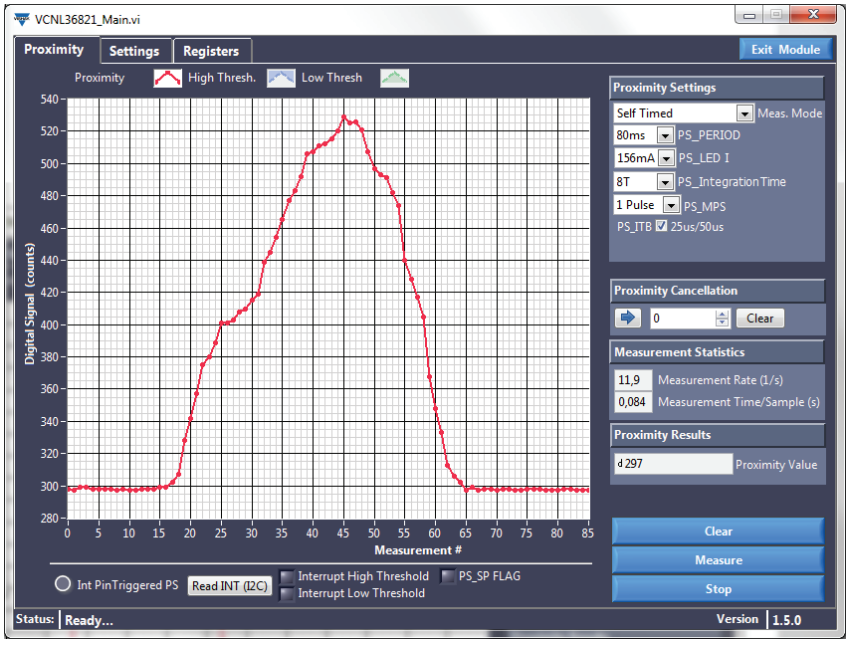


Fig. 22 - Hand in About 5 cm Distance Will Lead to More Than 500 Counts

For technical questions, contact: sensorstechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Designing the VCNL36821S Into an Application

3. Here the thresholds are programmed as 500 for the upper and 400 for the lower. To see these, both “Show” buttons are activated. The presence of an object should only be recognized when four consecutive measurements are above that threshold.

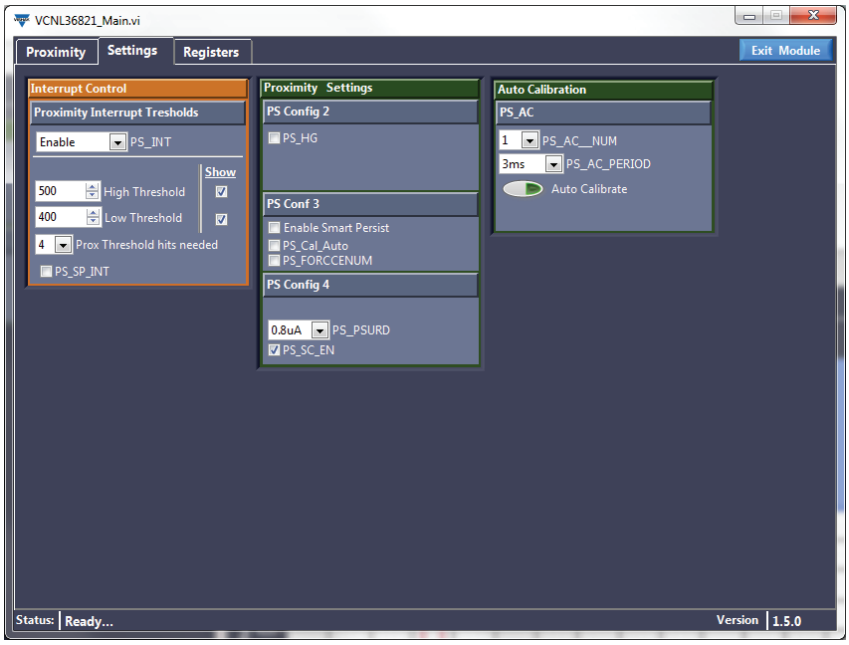


Fig. 23 - “Settings” Menu Within Demo Software

4. Just one or two measurements above the threshold will not activate the interrupt.

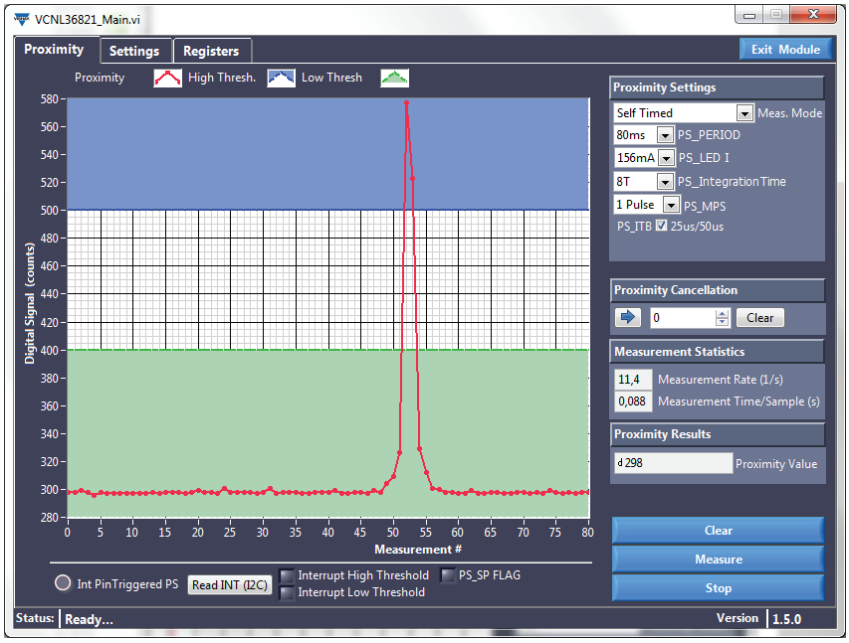


Fig. 24 - Upper and Lower Threshold Set and Hand in About 5 cm Distance

APPLICATION NOTE

For technical questions, contact: sensorstechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Designing the VCNL36821S Into an Application

5. With more than four measurements above the threshold, however, the interrupt is pulled low, as indicated by the red LED on the demo board and the red light: “Int Pin Triggered PS.”

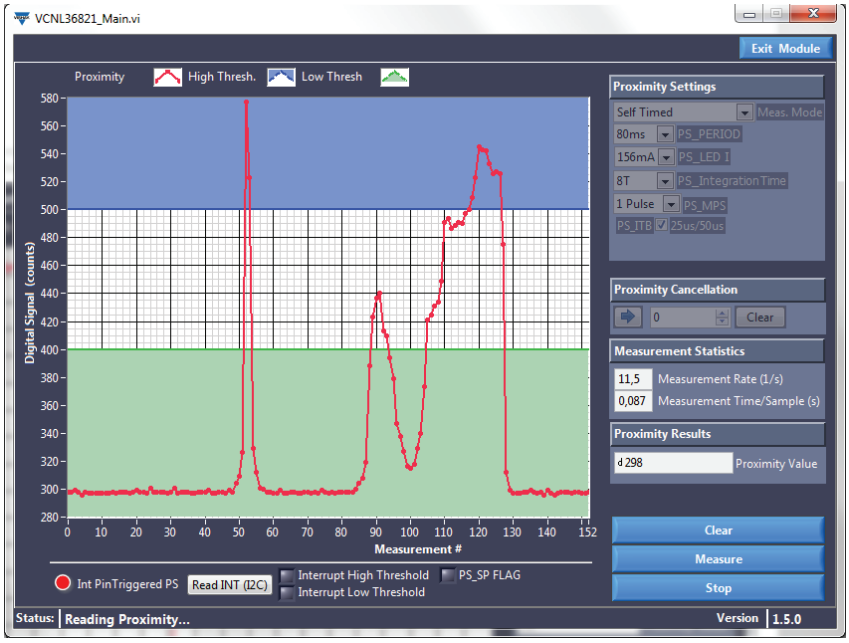


Fig. 25 - Hand in About 5 cm Distance for More Than 4 Consecutive Measurements Above Higher Threshold

6. The cancellation feature is used below. The “before seen” offset counts are subtracted. To do so, the value of 300 is entered for register number 05 = Prox_Cancellation.

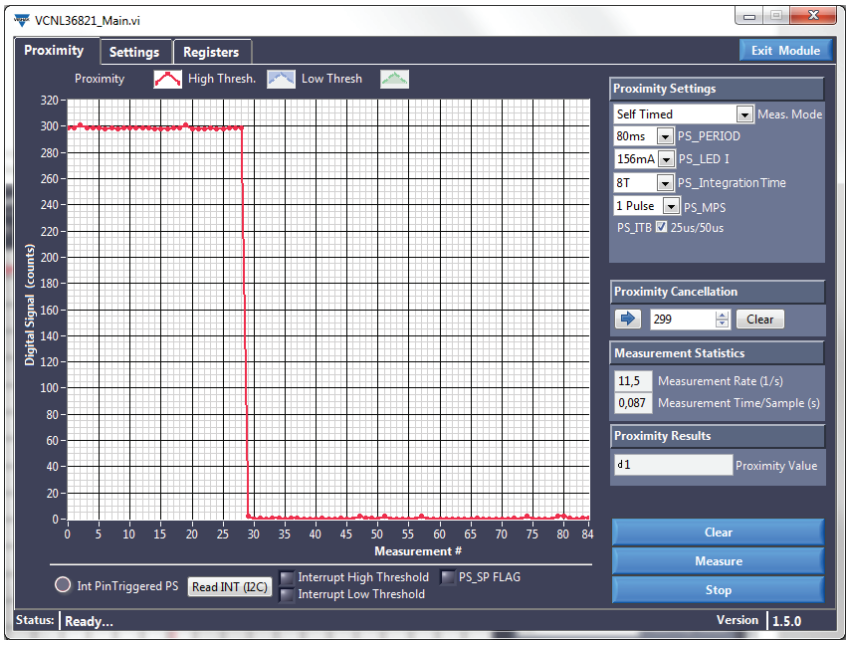


Fig. 26 - Cancellation Activated

For technical questions, contact: sensorstechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Designing the VCNL36821S Into an Application

7. The “before seen” offset counts of about 300 are now subtracted: 300 - 300 = 0. Also, the thresholds are now 300 counts lower. The higher threshold is 200 and lower is just 100.

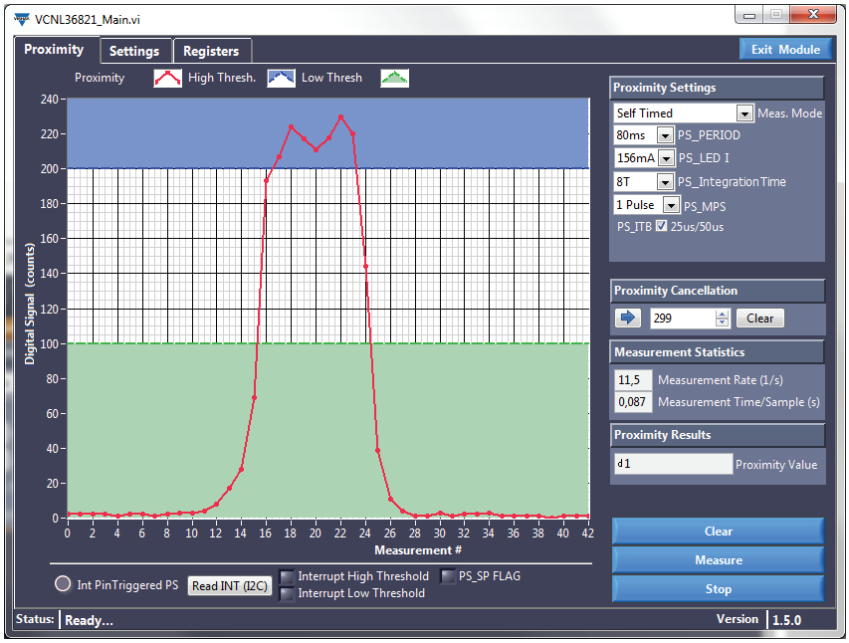


Fig. 27 - New Defined Thresholds With Cancellation Feature

If one chooses “logic mode” now and redefines the high threshold to 200 and low threshold as 100...

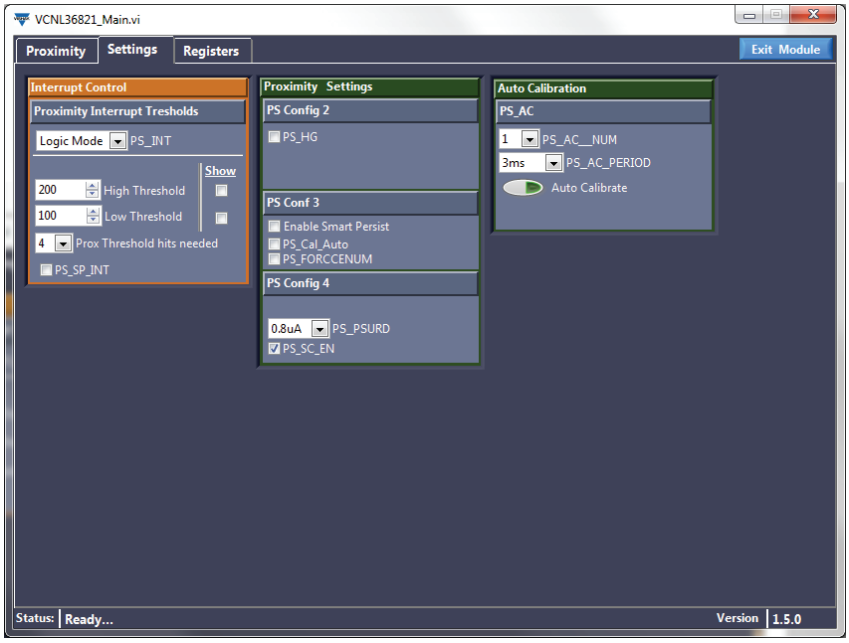


Fig. 28 - Logic Mode

For technical questions, contact: sensorstechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Designing the VCNL36821S Into an Application

… the interrupt will indicate the rise above the upper threshold and will also automatically be cleared when it falls below the lower threshold.

SMART PERSIST

One special feature for faster proximity measurements is also implemented, which is called “smart persist.”

This feature reduces the total reaction time until the interrupt is set to active, although four consecutive measurements should be above (or below) the defined threshold for safe acknowledgment.

Without “smart persist”, but with programmed hits above the defined threshold set to four, it will take three times the time of PS_Period. With PS_Period set to 40 ms this would be 3 x 40 ms.


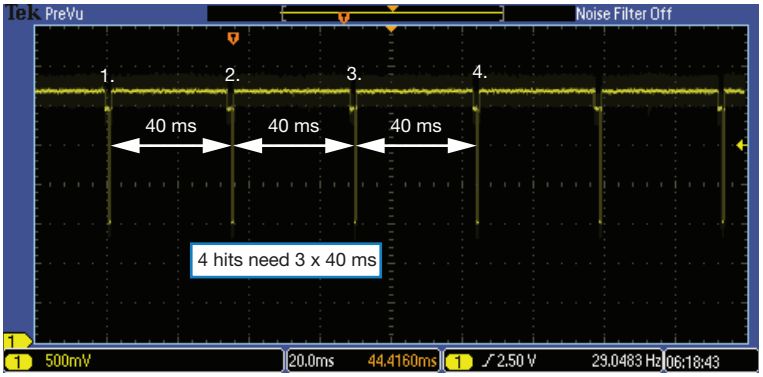


Fig. 29 - Interrupt Active After 4 Hits Above Threshold

With “smart persist” activated (bit 1 of PS_CONF1):

REGISTER: PS_CONF1 DESCRIPTION		
REGISTER NAME		**COMMAND CODE: 0x03_L (0x03 DATA BYTE LOW)**
Command	Bit	Description
PS_Period	7 : 6	(0 : 0) = 10 ms, (0 : 1) = 20 ms, (1 : 0) = 40 ms, (1 : 1) = 80 ms PS sample period setting
PS_PERS	5 : 4	(0 : 0) = 1, (0 : 1) = 2, (1 : 0) = 3, (1 : 1) = 4 PS interrupt persistence setting
PS_ INT	3 : 2	(0 : 0) = interrupt disable, (0 : 1) = logic high / low mode, (1 : 0) = interrupt enable, (1 : 1) = reserved
PS_SMART_PERS	1	0 = disable PS smart persistence, 1 = enable PS smart persistence
PS_ST	0	0 = PS start, 1 = PS stop, default = 1

or within the demo-tool:



The total needed time is reduced to just about 7 ms.

For technical questions, contact: sensorstechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Designing the VCNL36821S Into an Application

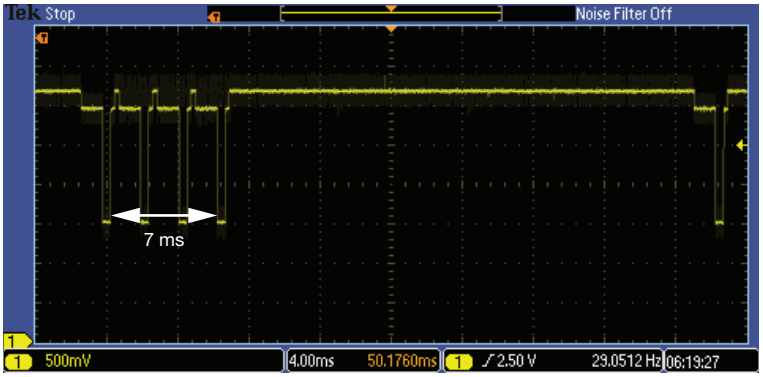


Fig. 30 - Smart Persist With PS_IT = 8T = 400 µs and PS_Period = 40 ms

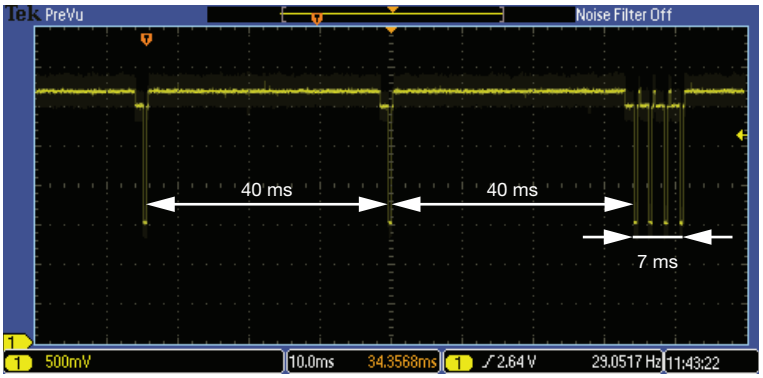


Fig. 31 - Always About 7 ms for These 4 Hits, Also When PS_Period is Programmed to Just 10 ms

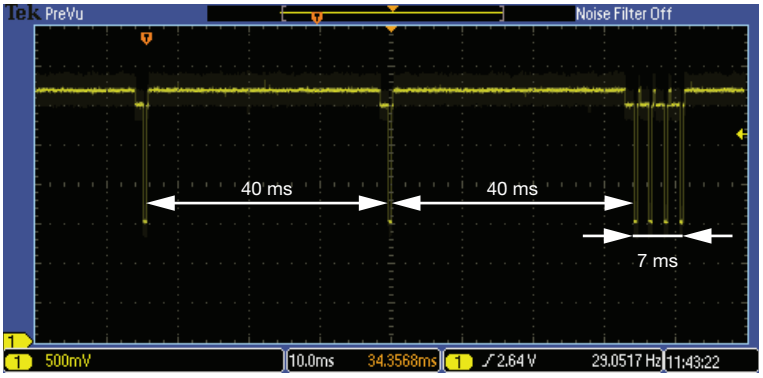


Fig. 32 - Smart Persist With Four Consecutive Proximity Pulses Short After Each Other

MULTI PULSE FEATURE

For high detection ranges, the intensity for each proximity measurement will be chosen to the maximum possible value. This can be achieved by programming the IRED current to a maximum of 156 mA and longest measurement pulse PS_IT of 400 µs.

Even further increase is possible using this so-called Multi-Pulse feature, PS_MPS.

For technical questions, contact: sensorstechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Designing the VCNL36821S Into an Application

With this it is possible to send more than one pulse for a single proximity measurement. As shown within the table and illustrated with Fig. 34 and Fig. 35 below, a burst with either 2, 4, or even 8 pulses one after the other is possible.

REGISTER: PS_CONF2 DESCRIPTION		
		COMMAND CODE: 0x03_H (0x03 DATA BYTE HIGH)
Command	Bit	Description
PS_IT	7 : 6	(0 : 0) = 1T, (0 : 1) = 2T, (1 : 0) = 4T, (1 : 1) = 8T
PS_MPS	5 : 4	(0 : 0) = 1, (0 : 1) = 2, (1 : 0) = 4, (1 : 1) = 8; PS multi-pulse setting
PS_ITB	3	0: ITB = 25 µs, 1: ITB = 50 µs
PS_HG	2	0 = disable, 1 = enable, PS high gain mode
Reserved	1 : 0	Default = (0 : 0)

With PS_IT of 400 µs and PS_MPS = 8 this needs then about 6 ms for one measurement, see Fig. 34 below. Fig. 35 shows it with 4 pulses and Fig. 36 shows these 8 pulses within a period of 80 ms.

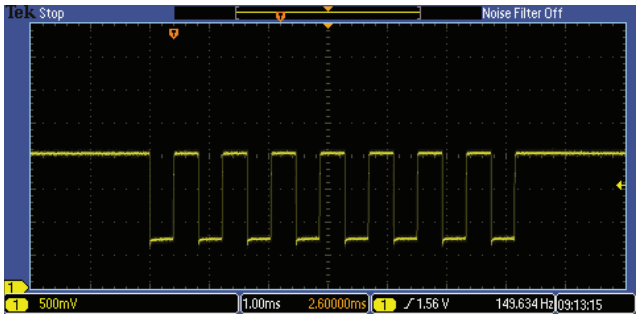


Fig. 33 - PS_IT = 8T (400 µs) and MPS = 8

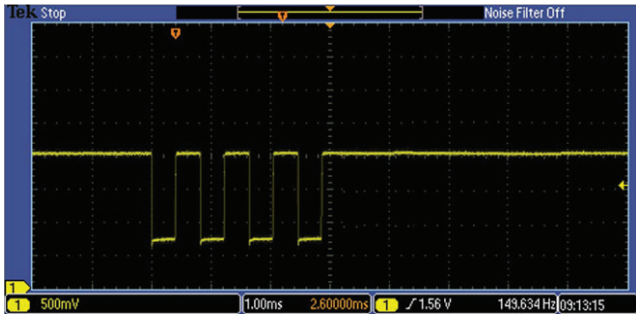


Fig. 34 - PS_IT = 8T (400 µs) and MPS = 4

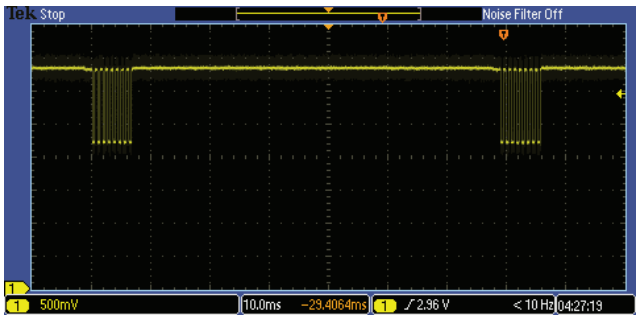


Fig. 35 - PS_Period = 80 ms and PS_IT = 8T (400 µs) and MPS = 8

With this much higher energy the detection distance could be increased up to about 40 cm (15 inch).

For technical questions, contact: sensorstechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Designing the VCNL36821S Into an Application

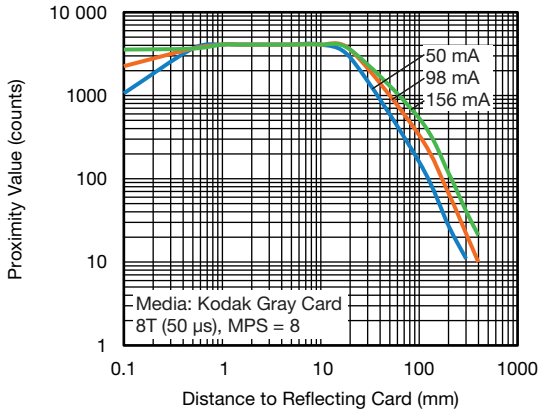


Fig. 36 - Proximity Value vs. Distance for PS_IT = 8T (400 µs) and MPS = 8

AUTO CALIBRATION

This new feature offers a direct and internal subtraction of the so-called “offset” counts that are seen when the sensor is built-in within its end application where at least the cover will show significant offset counts.

To use this feature just this “PS_AC” needs to be set to “1” = enable.

This auto calibration is carried out then with this specific AC parameters that needs to be chosen before: PS_AC_Periode and PS_AC_Num. Possible periodes are much more fast as the ones for normal proximity measurements, just between 3 ms and 24 ms. The auto calibration is then done when PS_AC_TRIG is set. Whole procedure is shown within Fig. 39.

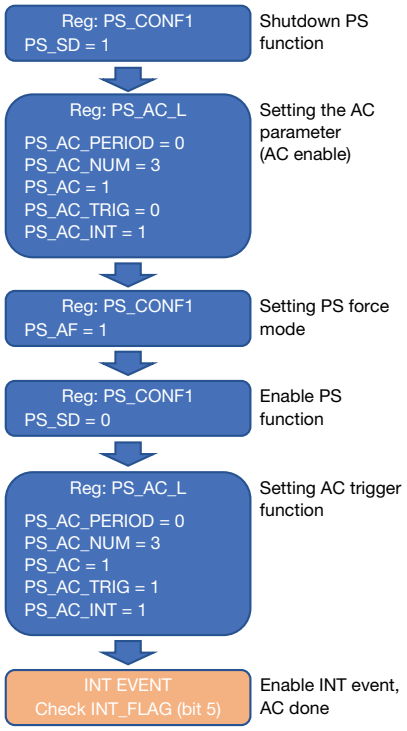


Fig. 37 - Software Flow Chart (for auto / dynamic calibration)

For technical questions, contact: sensorstechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Designing the VCNL36821S Into an Application

REGISTER: PS_CONF1		Command Code: 0x03_L (0x03 Data Byte Low)
COMMAND	BIT	Description
PS_Period	7:6	(0 : 0) = 10ms, (0 : 1) = 20ms, (1 : 0) = 40ms, (1 : 1) = 80ms PS Sample Period setting

REGISTER: PS_CONF2		Command Code: 0x03_H (0x03 Data Byte High)
COMMAND	BIT	Description
PS_IT	7:6	(0 : 0) = 1T, (0 : 1) =2T, (1 : 0) =4T, (1 : 1) = 8T
PS_MPS	5:4	(0 : 0) = 1, (0 : 1) =2, (1 : 0) =4, (1 : 1) = 8 PS Multi-Pulse setting
Reserved	3	Must be set to "1" when power on ready
PS_HG	2	0 = Disable, 1 = Enable, PS high gain mode
Reserved	1:0	Default= (0 : 0)

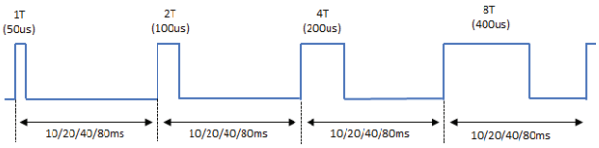


Fig. 38 - Normal PS Operation Setting

REGISTER: PS_AC_L		Command Code: 0x08_L (0x08 Data Byte Low)
COMMAND	BIT	Description
PS_AC_PERIOD	7:6	(0 : 0) = 3ms, (0 : 1) = 6ms, (1 : 0) = 12ms, (1 : 1) = 24ms PS Auto-calibration detect sample period setting
PS_AC_NUM	5:4	(0 : 0) = 1, (0 : 1) = 2, (1 : 0) = 4, (1 : 1) = 8 PS Auto-calibration detect sample number setting
PS_AC	3	0 = Disable; 1 = Enable PS Auto-calibration enable. Need set PS_AF=1
PS_AC_TRIG	2	0 = Disable; 1 = Enable Trigger one time Auto-Calibration
Reserved	1	Reserved
PS_AC_INT	0	0 = Disable; 1 = Enable PS Auto-calibration INT setting

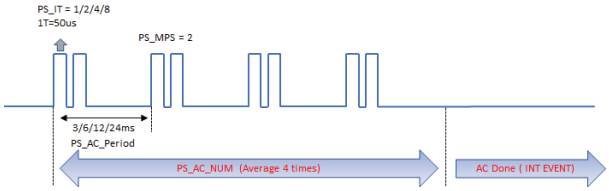


Fig. 39 - PS Auto Calibration Setting

REGISTER: PS_AC DESCRIPTION		
		COMMAND CODE: 0x08_L (0x08 DATA BYTE LOW)
Register	Bit	Description
PS_AC_PERIOD	7 : 6	(0 : 0) = 3 ms, (0 : 1) = 6 ms, (1 : 0) = 12 ms, (1 : 1) = 24 ms; PS auto-calibration detect sample period setting
PS_AC_NUM	5 : 4	(0 : 0) = 1, (0 : 1) = 2, (1 : 0) = 4, (1 : 1) = 8; PS auto-calibration detect sample number setting
PS_AC	3	0 = disable, 1 = enable; PS auto-calibration enable; need set PS_AF = 1
PS_AC_TRIG	2	0 = disable, 1 = enable; trigger one time auto-calibration
Reserved	1	Reserved
PS_AC_INT	0	0 = disable, 1 = enable; PS auto-calibration INT setting

For technical questions, contact: sensorstechsupport@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Designing the VCNL36821S Into an Application

READ OUT REGISTER DESCRIPTION			
Register	Command Code	Bit	Description
PS_Data_L	0xF8_L (0xF8 data byte low)	7 : 0	0x00 to 0xFF, PS output data
PS_Data_M	0xF8_H (0xF8 data byte high)	3 : 0	0x00 to 0x0F, PS output data
INT_Flag	0xF9_H (0xF9 data byte high)	7 : 6 5 4 3 2 1 0	Reserved PS_ACFLAG, after PS finishing auto-calibration, INT raise PS_SPFLAG, PS entering protection mode Reserved Reserved PS_IF_CLOSE, PS rises above PS_THDH INT trigger event PS_IF_AWAY, PS drops below PS_THDL INT trigger event
ID_L	FAH_L (FAH data byte low)	7 : 0	Default = 0010 0110, device ID LSB byte
ID_M	FAH_H (FAH data byte high)	7 : 6 5 : 4 3 : 0	(0 : 0) (0 : 0) slave address = 0x60 Version code (0 : 0 : 0 : 0) device ID MSB byte
PS_AC_Data_L	0xFB_L (0xFB data byte low)	7 : 0	0x00 to 0xFF, PS auto-calibration data (LSB)
PS_AC_Data_H	0xFB_H (0xFB data byte high)	7 6 5 : 4 3 : 0	AC_BUSY, when AC, the bit will be “1” AC_SUN, PS enters sunlight protect during auto-calibration Reserved 0x00 to 0xFF, PS auto-calibration data (MSB)

For technical questions, contact: sensorstechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000