
Part number **SKRABNE010** **6.2mm Square (Surface Mount) SKRA Series**

Water-proof Type | Dust-proof Type

Standard

Basic information



+ ZOOM

Type	Surface mount
Operating force	2.0N
Operating direction	Top push
Travel	0.4mm
Product height	3.4mm
Operating life	5,000,000 cycles
Initial contact resistance	100mΩ max.
Water-proof & Dust-proof Type	IP6X equivalent/IPX7
Stem color	Blue
Dimensions(W×D×H)	6.2×6.2×3.4


Specifications

Series type		Sharp feeling type
Operating temperature range		-40°C to +90°C
Absolute Maximum Ratings		50mA 16V DC
Rating (min.)		10μA 1V DC
Electrical performance	**Insulation resistance**	100MΩ min. 100V DC for 1 min.
	Voltage proof	250V AC for 1 min.
Durability	**Vibration**	10 to 55 to 10Hz/min., the amplitude is 1.5mm for all the frequencies, in the 3 direction of X, Y and Z for 2 hours respectively
Environmental performance	**Cold**	-40°C 96h
	Dry heat	90°C 96h
	Damp heat	60°C, 90 to 95%RH 96h
Minimum order unit(pcs.)	**Japan**	3,000
	Export	3,000

Selection Guide PDF
A definitive selection guide covering comprehensive information on TACT Switch™
View PDF ···›


How to Prevent TACT Switch™ Failure
Pre-Use Checklist
click here ···›

Dimensions

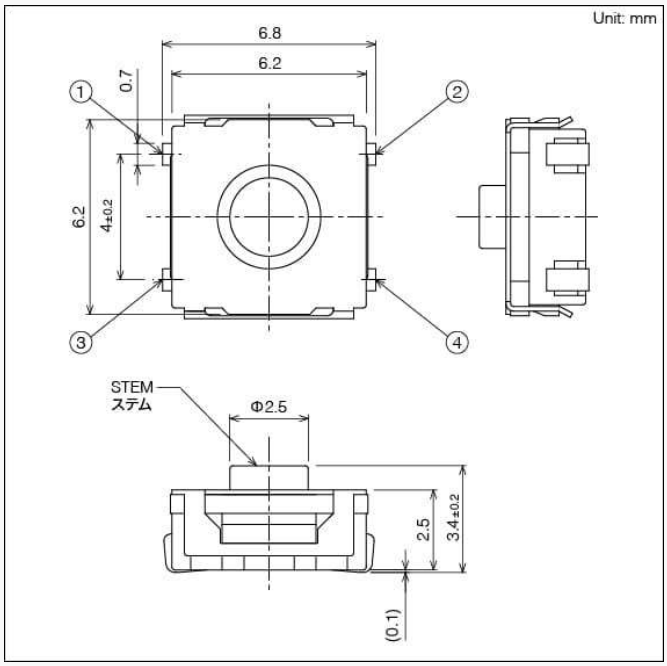

Open an expandable image in a separate window


Land Dimensions

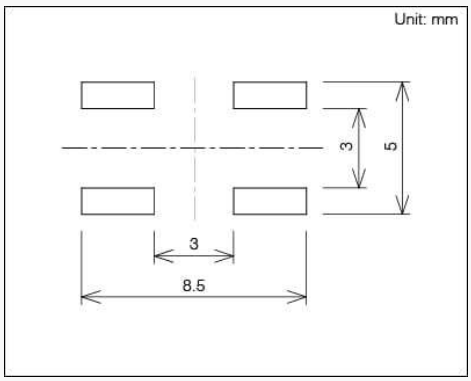

Open an expandable image in a separate window

Viewed from switch mounting face


Circuit Diagram



Open an expandable image in a separate window

Packing Specifications

Taping

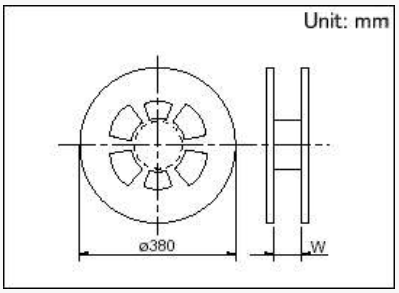

Number of packages (pcs.)	
1 reel	3,000
1 case / Japan	30,000
1 case / export packing	30,000

Reel width W(mm)
13.5


Tape width (mm)
12

Export package measurements (mm)
395×395×205

Soldering Conditions

Condition for Reflow

1. Heating method
   Double heating method with infrared heater.
2. Temperature measurement
   Thermocouple 0.1 to 0.2 Φ CA(K) or CC(T) at solder joints (copper foil surface). A heat resisting tape should be used for fix measurement.
3. Temperature profile

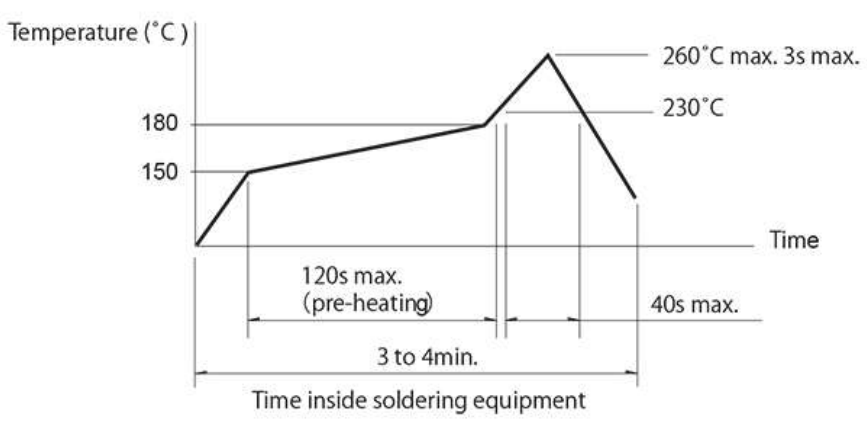

(1) The above temperature shall be measured of the top of switch. There are cases where PC board's temperature greatly differs from that of the switch, depending on the material, size, thickness of PC board's and others. Care, should be taken to prevent the switch's surface temperature from exceeding 260˚C.
(2) Soldering conditions differ depending on reflow soldering machines. Prior verification of soldering condition is highly recommended.

4. Allowable soldering time : 2 times Max.

Manual Soldering

Soldering temperature
350˚C max.

Duration of soldering
3s max.

Capacity of soldering iron
60W max.

1. Do not washing the TACT Switch™.
2. Prevent flux penetration from the top side of the TACT switch™.
3. Switch terminals and a PC board should not be coated with flux prior to soldering.
4. The second soldering should be done after the switch returns to normal temperature.

Members-Only Content

SKRABNE010

Product Drawing

File format: PDF

Product Material List

File format: PDF

F-S Curve

File format: PDF

Notes are common to this series/models

1. This site catalog shows only outline specifications. When using the products, please obtain formal specifications for supply.
2. Please place purchase orders for taping products per minimum order unit (1 reel or a case).
3. Protective structure :
   Assumes the switch is left alone without being operated. Under the specified conditions, dust and water ingress with a significant impact on the switch's on-off function is prevented.
   IP67-level dust and water resistance is guaranteed for the switch alone and performance may not be guaranteed depending on the mounting conditions and usage.

Cautions

1. When terminals are exposed to mechanical stress during soldering, it may cause degradation in deformation and electrical property.
2. Through-hole PC board, or a PC board thickness other than the recommendation may cause larger heat stress. Prior verification is highly recommended.
3. In prior to the 2nd soldering swith shall be stable with normal temperature. It may cause deformation of swith, loose terminals, terminal removed from PC board, and / or degradation of electric property.
4. Verify samples with actual mass production conditions.
5. After soldering, do not wash switches with a solvent, etc.
6. The products are designed and manufactured for direct current resistance. Individual consultation is recommended for use of other resistances such as inductive (L) or capacitive (C).
7. The sizes of holes and patterns on a PC board for mounting a switch, be asper the recommended dimensions in the product drawings.
8. This switch is designed for manually operated units. Must not use this switch for a mechanical detection unit. For detection purposes, please use our detection switch.
9. The switch will be broken if impact force or a greater stress than that specified is applied. Take great care not to let the switch be subject to greater stress than specified.
10. Do not apply a force from the side of the stem.
11. Be sure to push the center of switch for "without-stem" type. Extreme care is required for a hinge structure type, as the activation point may shift when it is pressed down.
12. The circuit setting (software setting) shall be ensured for error-free operations, caused by bounce and chattering as specified by each model of the switches.
13. Prior verification is needed to ensure that no corrosive gas-generating components are used near our switch. It may give negative influence such as contact failure.
14. Contact resistance of a carbon contact type may vary depending on push force. Confirm that it functions sufficiently in using TACT Switch™ with a voltage divider circuit.

15. Be aware of dust intrusion into a non dust-proof TACT switch™.
16. Storage
    1. Store the products as delivered, at a normal temperature and humidity, without direct sunshine and corrosive gas ambient. Use them at an earliest possible timing, not later than six months upon receipt.
    2. After breaking the seal, keep the products in a plastic bag to prevent out ambient air, store them in the same environment as above, and use all as soon as possible.
    3. Do not stack too many switches.
    4. Store the key switches in released position.
17. TACT Switch is a trademark or registered trademark of Alps Alpine Co., Ltd.